

DC-18 GHz

Type N Coaxial
Fixed Terminations

- Low VSWR
- Broadband
- Medium Power, Superior Performance
40W, 20W, 10W, 5W, and 1W Models






Specifications

FREQUENCY RANGE (GHz)	MODEL	POWER**		VSWR* (Max)	WEIGHT	
		AVERAGE (Watts)	PEAK (kW)		Oz	Gr.
DC-12.4	376BNM	40	7.5	1.10 +.025f	10	283
DC-18	378NM	1	1	1.04 +.003f	3	85
	370BNM	5	2	1.05 +.015f	3	85
	379BNM	5	2	1.05 +.010f	3	85
	377BNM	5	2	1.05 +.005f	3	85
	375BNM	10	5	1.05 +.015f	3	85
	374BNM	20	5	1.05 +.015f	5	142
2-18	367NM	40	5	1.07 +.005f	9	255

*f denotes frequency in GHz.

**IMPORTANT NOTE: Power rating is specified at 25° and free air convection at atmospheric (760mm) pressure. Derate power capability linearly from stated value at 25°C to 0 watts at 135°C.

Outline Drawings

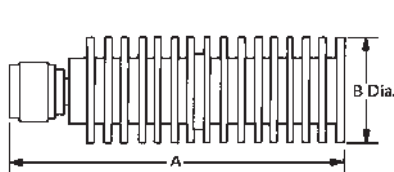

MODEL	A	B
367NM	7.57	1.78
374BNM	2.44	1.28
376BNM	5.07	1.66

MODEL	A	B
370BNM	1.67	.72
377BNM	1.67	.72
378NM	1.88	.72
379BNM	1.67	.72







MODEL 375BNM

All dimensions are max. unless otherwise specified.

Terminations

50 Years of
Excellence

Typical Performance Curves

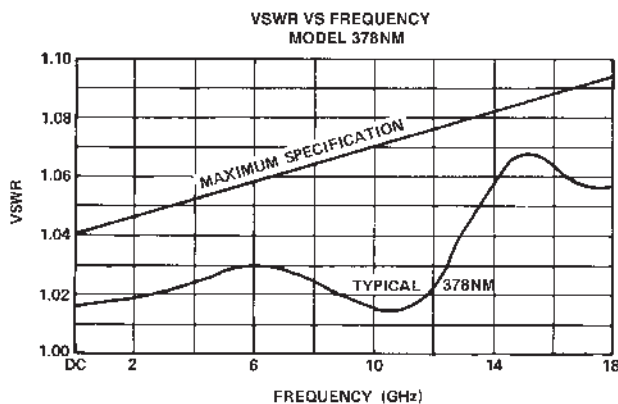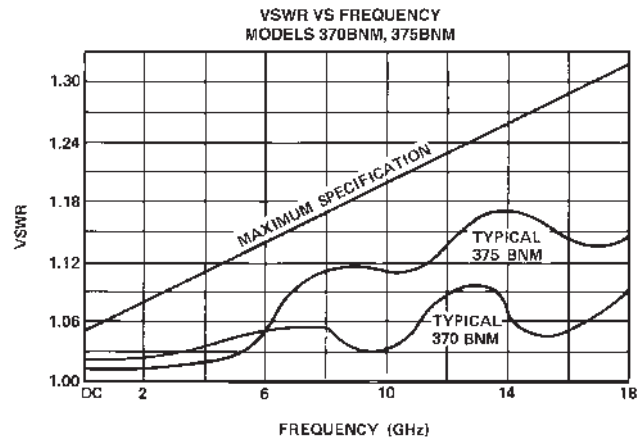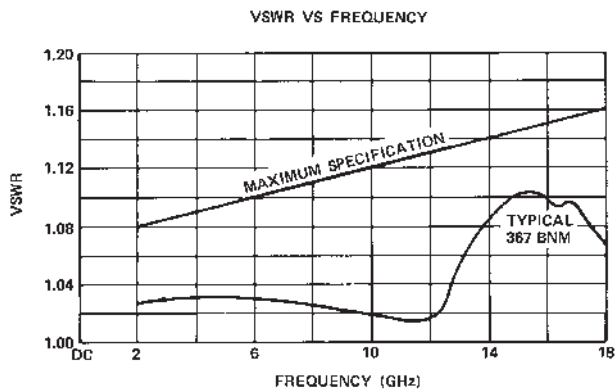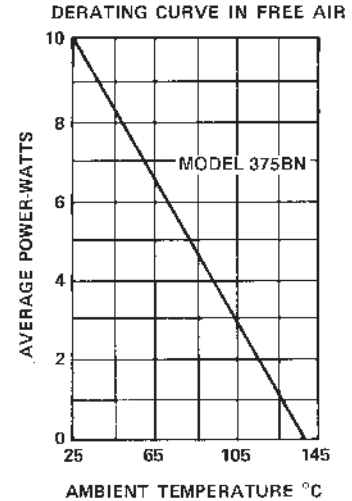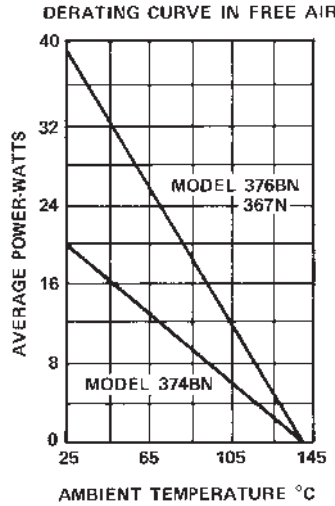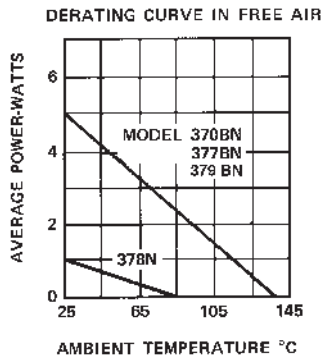

narda

an communications company